



RANGER™

1-4 x 24 RIFLESCOPE

VORTEX® RANGER™ 1-4x24 RIFLESCOPE

Specifically designed for the tactical, law enforcement, and committed precision shooting communities, the Ranger™ 1-4x24 riflescope offers the highest levels of performance and reliability. With features such as matched turret/reticle subtensions, a CRS zero stop mechanism, and a precision ranging reticle, the Ranger is ready for any situation.



SECOND FOCAL PLANE RETICLE

The Ranger™ riflescope uses a second focal plane (SFP) reticle. The advantage of a SFP reticle is that it always maintains the same appearance. Shooters using reticle hashmarks should be aware that the listed subtensions used for estimating range, holdover, and wind drift correction are only accurate at the 4x magnification.

RIFLESCOPE ADJUSTMENTS

Reticle Focus

The Ranger™ riflescope uses a fast focus eyepiece designed to quickly and easily adjust the focus on the riflescope's reticle.

To adjust the reticle focus:

1. Look through the riflescope at a blank white wall or up at the sky.
2. Turn the eyepiece focus knob in or out until the reticle image is as crisp as possible.



Note: Try to make this particular adjustment quickly, as the eye will try to compensate for an out-of-focus reticle.

Once this adjustment is complete, it will not be necessary to re-focus every time you use the riflescope. However, because your eyesight may change over time, you should re-check this adjustment periodically.

WARNING: Looking directly at the sun through a riflescope, or any optical instrument, can cause severe and permanent damage to your eyesight.

About Parallax

The Ranger™ 1-4x24 riflescope does not have a parallax focus and is factory focused at a distance of 100 yards. Using good, consistent shooting form and cheek weld when shooting at distances other than 100 yards will minimize most error problems associated with parallax.

Windage and Elevation Adjustments

The Ranger™ riflescope incorporates precision finger adjustable elevation and windage dials with audible clicks. Each audible click moves the bullet's point-of-impact 1/2 of a minute of angle (MOA).

1/2 MOA closely corresponds to 1/2 inch at 100 yards, 1 inch at 200 yards, 1 1/2 inches at 300 yards - taking two (2) clicks to move the bullet's point-of-impact approximately one inch at 100 yards.

To make adjustments:

1. Turn the adjustment knob in the appropriate direction: Up/Down or Left/Right as indicated by the arrows.
2. Following the directional arrows, turn the knobs in the direction you wish the bullet's point-of-impact to go to.



Variable Power Adjustments

To change magnifications, turn the magnification ring to the desired level. The patented Vortex® MagView system will provide a low light reference for magnification level.



Illumination Adjustments

The Vortex® Ranger™ riflescope uses a variable intensity reticle illumination system to aid in low light performance. To activate the illumination, rotate the adjustment knob in either direction.

The illumination knob allows for 10 levels of brightness intensity; an off click between each level allows the shooter to turn the illumination off and return to a favored intensity level with just one click.

Replacing the Battery

1. Unscrew the outer cap with a coin.
2. Remove the battery.
3. Replace with a new CR2032 battery.
4. Re-install the outer battery cap and be sure to fully tighten it down.




Turret Rotation

The Ranger™ riflescope incorporates the Vortex® patented Radius Bar to visually assist in keeping track of turret rotations. The radius bar provides a quick visual reference that allows the shooter to confirm:

- Knob orientation is correct and has not shifted as a result of accidental contact.
- Knob orientation is at the zero point when using the CRS feature.
- By watching the position of the bar while making elevation adjustments, the shooter is able to quickly track full, half and quarter rotations.

To get these benefits from the Radius Bar, the “0” mark on the turret must be indexed with the zero reference line on turret post (see **Setting the CRS Stop and Indexing Elevation Knob** section on page 14).

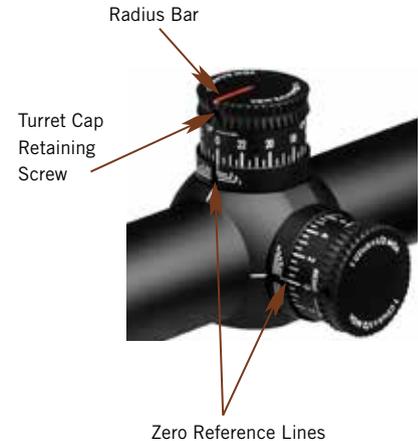

Customizable Rotational Stop (CRS)

The Vortex® Ranger™ riflescope elevation turret incorporates the unique CRS rotation stop feature. After the rifle is sighted in, the design of the CRS allows a shooter to quickly and easily return to an original zero point when using the elevation turret to dial-in temporary bullet drop corrections.

The CRS feature is particularly useful when dialing large multi-revolution elevation corrections. Without this feature, the shooter must pay very careful attention when dialing these large corrections. If the shooter loses track of the number of revolutions, the original zero point may become lost when returning the adjustment. CRS allows the elevation dial to be quickly spun back to original zero without having to carefully count revolutions or clicks.

Once the CRS shims are installed after sight-in, the elevation dial will stop turning shortly past the original zero point when being returned (turning clockwise direction) from a temporary elevation adjustment. The shooter can then turn the elevation knob a partial turn in a counter-clockwise direction until the zero reference and radius bar are correctly aligned—achieving the original zero point.

See CRS shim installation in the Bore Sighting and Final Range Sight-in sections.



CRS Shims

RIFLESCOPE MOUNTING

To get the best performance from your Ranger™ riflescope, proper mounting is essential. Although not difficult, the correct steps must be followed. If you are unsure of your abilities, it would be best to use the services of a qualified gunsmith.

Centering of the Reticle

The Ranger™ riflescope is pre-set from the factory with the reticle in the center of the adjustment ranges.

If you have changed the settings and wish to approximately reset the reticle to the center, this can be done easily:

- Turn the windage or elevation dial as far as possible in either direction. *Do not force the dial. As soon as any resistance is felt, stop turning.*
- Carefully count the dial rotations while turning the dial back in the opposite direction. *Stop turning as soon as resistance is felt.*
- Turn the dial the other direction to half the amount of rotations counted in step one.

Complete this procedure for both windage and elevation dials to approximately center the reticle.

Rings and Bases

Mount an appropriate base and matching rings to your rifle according to the manufacturer's instructions. The Ranger™ riflescope requires 30 mm rings.

Ring height will depend on the firearm and mount being used. Consult the ring and base manufacturer for suggested heights.



AR-style rifles will usually require an extra-high mounting height on a specialized cantilever-style mount such as the Vortex® Pro cantilever ring mount (shown above).

Eye Relief and Reticle Alignment

After installing the bottom ring halves on the mounting base, place the riflescope on the bottom ring halves and loosely install the upper ring halves. Before tightening the scope ring screws, adjust for maximum eye relief to avoid injury from recoil:

1. Set the riflescope to the middle of its magnification range.
2. Slide the riflescope as far forward as possible in the rings.
3. While viewing through the riflescope in a normal shooting position, slowly slide the riflescope back towards the shooter's face—paying attention to the field of view. *Just as the full view is visible, stop.*
4. Without disturbing the front-back placement, rotate the riflescope until the vertical crosshair exactly matches the vertical axis of the rifle. Use of a reticle leveling tool, a weight hung on a rope, flat feeler gauges, or bubble levels will help with this procedure.
5. After aligning the reticle, tighten and torque the ring screws down per the manufacturer's instructions.



Using bubble levels to square the riflescope to the base.

Bore Sighting

Initial bore sighting of the riflescope will save time and money at the range. This can be done by using a mechanical or laser bore sighter according to the manufacturer's instructions or by removing the bolt and sighting through the barrel on some rifles.

To visually bore sight a rifle:

1. Place the rifle solidly on a rest and remove the bolt.
2. Sight through the bore at a target approximately 100 yards away.
3. Move the rifle and rest until the target is visually centered inside the barrel.
4. With the target centered in the bore, make windage and elevation adjustments until the reticle crosshair is also centered over the target.



Visually bore-sighting a rifle.

Final Range Sight-In and CRS Stop Set

After the riflescope has been bore-sighted, final sight-in and CRS stop set should be done at the range using the exact ammunition expected to be used while shooting. Sight in and zero the riflescope at the preferred distance. 100 yards is the most common zero distance, although a 200 yard zero may be preferred for long range applications.

Note: Be sure the reticle is in focus (see **Reticle Focus** section on page 4).

1. Following all safe shooting practices, fire a three-shot group as precisely as possible.
2. Next, adjust the reticle to match the approximate center of the shot group (see **Windage and Elevation Adjustment** section on page 5).

Note: If the rifle is very solidly mounted and cannot be moved, simply look through the scope and adjust the reticle until it is centered on the fired group.

3. Carefully fire another three-shot group and see if the bullet group is centered on the bullseye.

This procedure can be repeated as many times as necessary to achieve a perfect zero.

Setting the CRS Stop and Indexing Elevation Knob

After obtaining a satisfactory zero, the CRS stop can be set if desired:

1. Loosen the three turret cap retaining screws on the elevation turret. Gently pull the turret cap straight up and off of the turret post, being careful not to rotate the turret post.
2. Slide the CRS shims on the center section of the turret post below the V-grooved part.

Place CRS shims in this groove.



Alternate shim installation direction with each shim.



Use as many shims as necessary to completely fill up the space. Do not try to force in a last shim once the clearance is very close—a tiny remaining gap is normal.



3. After filling the center gap on the post with shims, replace the elevation cap.
4. Align the turret cap so the “0” mark on the cap matches up with the “0” reference line on the turret shroud. Again, be sure not to rotate the actual turret mechanism in the process.
5. Re-tighten the retaining screws, but do not overtighten. Use of thumb and forefinger on the short end of the hex wrench will provide sufficient force.



Align the elevation turret cap.

Indexing the Windage Knob

1. Loosen the three retaining screws on windage turret cap.
2. Carefully rotate the cap until the “0” mark on the cap matches up with the “0” reference line on the turret post. Be sure that the cap is freely turning and that you don’t rotate the actual turret mechanism.
3. Re-tighten the windage knob retaining screws, but do not overtighten. Use of thumb and forefinger on the short end of the hex wrench will provide sufficient force.

Once the windage and elevation knobs are correctly indexed to the zero mark, temporary corrections can be safely dialed into the scope without worry of losing the original zero.



Align the windage turret cap.

Using the CRS Zero Stop

Once the CRS shims are installed, the elevation dial will stop turning shortly past the original zero point when being returned (turning clockwise direction) from a temporary elevation adjustment.

Turn the elevation knob a partial turn in a counter-clockwise direction until the Radius Bar is correctly aligned with scope axis and zero marks match. This setting will match the original zero point.



Point at which the knob stops turning.

Note: If re-zeroing at a future time, be sure to remove all CRS shims before sight-in.



Correct alignment for zero point.

MAINTENANCE

Cleaning

The fully waterproof and fogproof Vortex® Ranger™ riflescope requires very little routine maintenance other than periodically cleaning the exterior lenses. The exterior of the scope may be cleaned by wiping with a soft, dry cloth.

When cleaning the lenses, be sure to use products, such as the Vortex® Fog Free cleaning products or Lens Pen, that are specifically designed for use on coated optical lenses.

- Be sure to blow away any dust or grit on the lenses prior to wiping the surfaces.
- Using your breath, or a very small amount of water or pure alcohol, can help remove stubborn things like dried water spots.

Lubrication

All components of the Ranger™ riflescope are permanently lubricated, so no additional lubricant should be applied.

Note: Other than to remove the turret caps, do not attempt to disassemble any components of the riflescope. Disassembling of riflescope may void warranty.

Storage

If possible, avoid exposing your Vortex® riflescope to direct sunlight or any very hot location for long periods of time.

TROUBLESHOOTING

Sighting-in Problems

Many times, problems thought to be with the scope are actually mount problems. Be sure the mounts are tight to the rifle and the scope is secured so it doesn't twist or move in the rings.

An insufficient windage or elevation adjustment range may indicate problems with the base mount, base mount holes drilled in the rifle's receiver, or barrel/receiver alignment.

Check for Correct Base and Ring Alignment

1. Re-center the scope reticle (see **Centering of the Reticle** section on page 9).
2. Attach bore sighter, or remove bolt and visually boresight rifle.
3. Look through the scope. If the reticle appears way off center on the boresighter image or when compared to the visually centered target when looking through rifle's bore, there may be a problem with the bases or rings being used. Confirm that correct base and rings are being used—and in the proper orientation.

Grouping Problems

There are many issues that can cause poor bullet grouping.

- Maintain a good shooting technique and use a solid rest.
- Check that all screws on rifle's action are properly tightened.
- Be sure rifle barrel and action are clean and free of excessive oil or copper fouling.
- Check that rings are correctly torqued per the manufacturer's instructions.
- Some rifles and ammunition don't work well together—try different ammunition and see if accuracy improves.



VIP WARRANTY

OUR UNCONDITIONAL PROMISE TO YOU.

We promise to repair or replace the product. Absolutely free.

- ▶ **Unlimited**
- ▶ **Unconditional**
- ▶ **Lifetime Warranty**

Learn more at www.VortexOptics.com

service@VortexOptics.com • 800-426-0048

Note: The VIP Warranty does not cover loss, theft, deliberate damage, or cosmetic damage not affecting product performance.



WWW.VORTEXOPTICS.COM

M-00176-0
© Vortex Optics, USA